


FEATURES

- Vented reinforced plastic chassis
- Proprietary cone material with natural fibers made in-house
- Butyl rubber surround for smooth frequency response
- Vented motor system for low compression
- Long stroke linear suspension for improved dynamics
- Non-resonant long life lead wires

Specs :

Nominal Impedance	8 Ω	Free air resonance, Fs	59 Hz
DC resistance, Re	6.4 Ω	Sensitivity (2.83 V / 1 m)	84 dB
Voice coil inductance, Le	0.36 mH	Mechanical Q-factor, Qms	3.63
Effective piston area, Sd	50 cm ²	Electrical Q-factor, Qes	0.55
Voice coil diameter	25.4 mm	Total Q-factor, Qts	0.48
Voice coil height	15 mm	Moving mass incl.air, Mms	4.9 g
Air gap height	5 mm	Force factor, Bl	4.6 Tm
Linear coil travel (p-p)	10 mm	Equivalent volume, Vas	5.3 liters
Magnetic flux density	0.84 T	Compliance, Cms	1.48 mm/N
Magnet weight	0.32 kg	Mechanical loss, Rms	0.5 kg/s
Net weight	0.70 kg	Rated power handling*	30 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

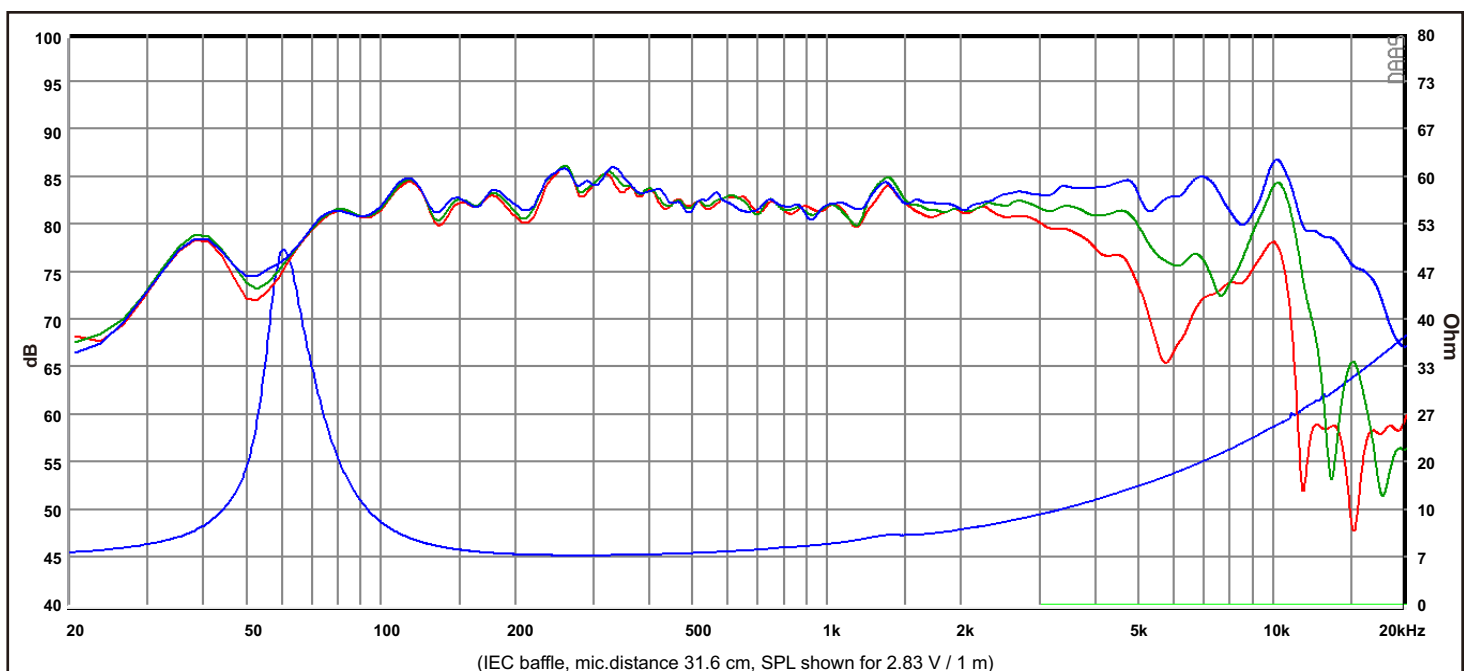

Response Curve :
 - - - (Blue) : on axis

- - - (Green) : 30° off-axis

- - - (Red) : 60° off-axis