


### FEATURES

- Precision diaphragm assembly
- Unique foil damping
- Optimized rear chamber
- Two part faceplate
- Smooth controlled dispersion
- Very flat impedance curve

### Specs :

Nominal Impedance	4 Ω
DC resistance, Re	3.9 Ω
Effective piston area, Sd	12.6 cm <sup>2</sup>
Free air resonance, Fs	2200 Hz
Sensitivity (2.83 V / 1 m)	91 dB
Frequency range	2400-30000 Hz
Rated power handling*	100 W
Net weight	332 g

\* IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct

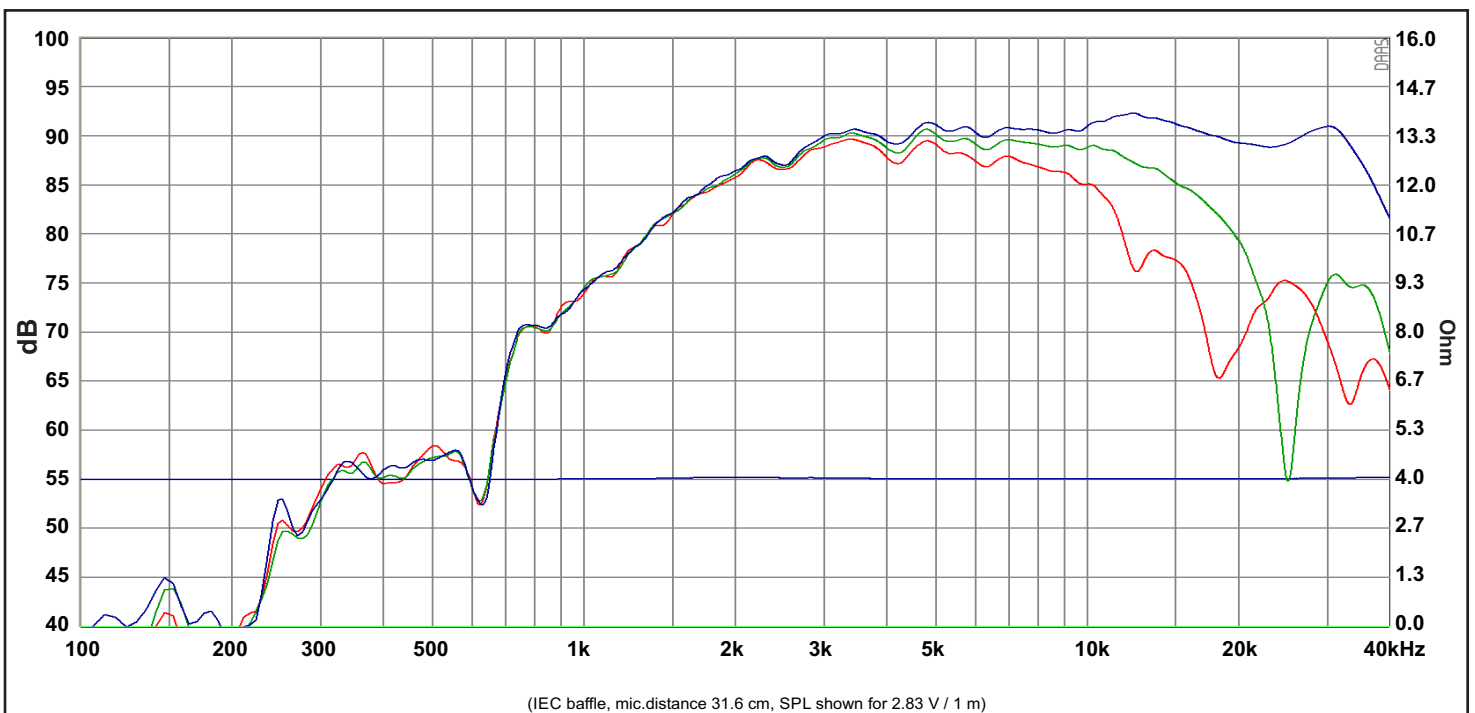

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— ( Red ) : 60° off-axis

REV.6 (22.03.2022)